

Product Specifications

MODEL
24CFO-EWDS-3

CATEGORY
Circulation

DESCRIPTION
24" circulation fan with epoxy coated washdown duty motor, stainless steel blade and stainless steel OSHA guards designed for industrial use.

FEATURES


- **Motor**
 - Totally enclosed, maintenance-free ball bearing, thermally protected permanent split capacitor.
 - Washdown duty motor coated with USDA® approved non-toxic white epoxy includes yoke mount bracket.
- Three-wing stainless steel fan blade.
- Stainless steel fan guard meets OSHA requirements.

DIMENSIONS

A = 27" B = 7" C = 14"

PERFORMANCE

CCFM
Test Number Schaefer

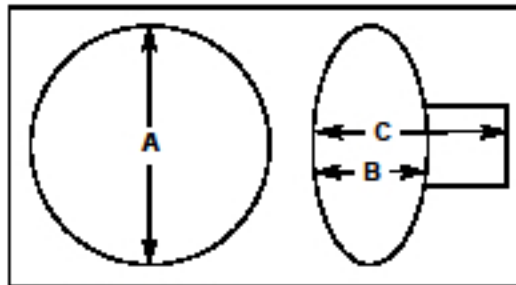

Drawing not to scale.

MOTOR

CS102WD-3	1/2HP	1 Speed	60 Hz	3 Phase	208-230 / 460 Volts
Insul = B	TEFC	1725 RPM	SF = 1.25	Max 40° C	2.5-2.0 / 1.0 Amps

BLADE

SSFB-243-58	3 Wings	5/8" Bore	Stainless Steel
-------------	---------	-----------	-----------------

SHIPPING

__ lbs	27" x 27" x 18"	UPS = Yes	Pallet Quantity = 8
--------	-----------------	-----------	---------------------

Aquality
WATER SYSTEMS INC.®