

Product Specifications

MODEL
24CFO-EWDS

CATEGORY
Circulation

DESCRIPTION
24" circulation fan with epoxy coated washdown duty motor, stainless steel blade and stainless steel OSHA guards designed for industrial use.

FEATURES


- **Motor**
 - Totally enclosed, maintenance-free ball bearing, thermally protected permanent split capacitor.
 - Washdown duty motor coated with USDA® approved non-toxic white epoxy includes yoke mount.
- Three-wing stainless steel fan blade.
- Stainless steel fan guard meets OSHA requirements.

DIMENSIONS

A = 27" B = 7" C = 14"

PERFORMANCE

CCFM 7789
Test Number Schaefer 0372

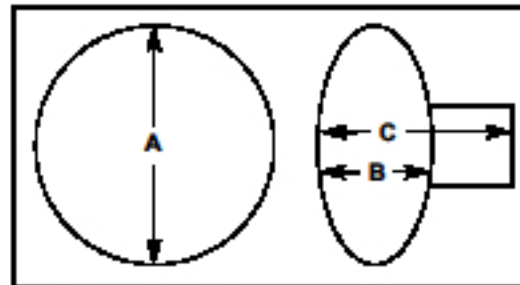

Drawing not to scale.

MOTOR

CS102WD 1/2HP 1 Speed 60 Hz 1 Phase 115 / 230 Volts
Insul = F TEAO 1700 RPM SF = 1 Max 40° C 5.9 / 2.9 Amps

BLADE

SSFb-243-58 3 Wings 5/8" Bore Stainless Steel

SHIPPING

__ lbs 27" x 27" x 18" UPS = Yes Pallet Quantity = 8

AQUALITY
WATER SYSTEMS INC.