

Product Specifications

MODEL
24CFO-SWDP-3

CATEGORY
Circulation

DESCRIPTION
24" circulation fan with all stainless steel washdown duty motor, polypropylene blade and stainless steel OSHA guards designed for industrial use.

FEATURES


- Motor
 - Totally enclosed, maintenance-free ball bearing, permanent split capacitor.
 - Corrosion resistant all stainless steel washdown duty motor includes yoke mount bracket.
- Four-wing polypropylene fan blade.
- Stainless steel fan guard meets OSHA requirements.

DIMENSIONS

A = 27" B = 7" C = 13"

PERFORMANCE

CCFM 7446
Test Number Schaefer 0356

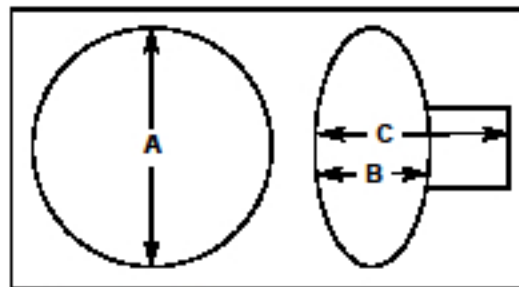

Drawing not to scale.

MOTOR

CS102SSL-3	3 Phase	1 Speed	SF = 1.15	Insul = F	Max 40° C	TENV
60 Hz	1/2HP	1740 RPM	208-230 / 460V		1.5-1.6 / 0.8 Amps	
50 Hz	1/3HP	1440 RPM	190 / 380V		1.6 / 0.8 Amps	

BLADE

PFB-244 4 Wings 5/8" Bore Polypropylene

SHIPPING

__ lbs 27" x 27" x 18" UPS = Yes Pallet Quantity = 8

Aquality[®]
WATER SYSTEMS INC.