

Product Specifications

MODEL
30CFO-SWDS-3

CATEGORY
Circulation

DESCRIPTION

30" circulation fan with three phase all stainless steel washdown duty motor, stainless steel blade and stainless steel OSHA guards designed for industrial use.



DECIBELS



0'=88 20'=74.5 40'=70

FEATURES


- Motor
 - Totally enclosed, maintenance-free ball bearing, permanent split capacitor.
 - Corrosion resistant all stainless steel washdown duty motor includes yoke mount bracket.
- Two-wing stainless steel fan blade.
- Stainless steel fan guard meets OSHA requirements.

DIMENSIONS

A = 33" B = 7" C = 13"

PERFORMANCE

CCFM 10055
CFM/Watt 25.20
Test Number 0567

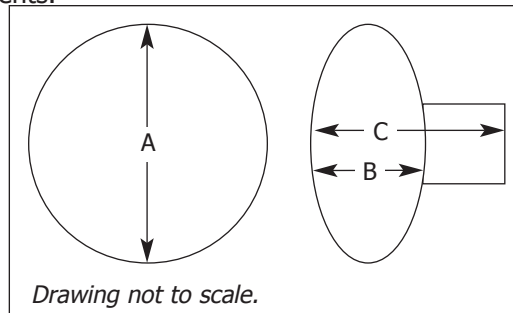

MOTOR

CS102SSL-3	1/2 HP	1 Speed	3 Phase	SF = 1.15	Max 40° C
Insul = F	60 Hz	1740 RPM	208-230/460 V	1.5-1.6/0.8 A	
TENV	50 Hz (1/3 HP)	1440 RPM	190/380 V	1.6/0.8 A	

BLADE

SSFB-302-B	2 Wings	5/8" Bore	10° Pitch	Stainless Steel
------------	---------	-----------	-----------	-----------------

SHIPPING

60 lbs	34" x 34" x 19"	UPS = Yes	Pallet Quantity = 8
--------	-----------------	-----------	---------------------



210-493-4545
www.aqualitywater.com

Test data, performance, energy consumption and other specifications are based on results in a controlled environment. Actual results will vary. Product specifications subject to change. ©2013