

Product Specifications



MODEL
24CFO-SWDP

CATEGORY
Circulation

DESCRIPTION
24" circulation fan with all stainless steel washdown duty motor, polypropylene blade and stainless steel OSHA guards designed for industrial use.

FEATURES

- Motor
 - Totally enclosed, maintenance-free ball bearing, thermally protected permanent split capacitor.
 - Corrosion resistant all stainless steel washdown duty motor includes yoke mount bracket.
- Four-wing polypropylene fan blade.
- Stainless steel fan guard meets OSHA requirements.

DIMENSIONS

A = 27" B = 7" C = 14"

PERFORMANCE

CCFM 7307
Test Number 0355

MOTOR


CS102SSL	1/2 HP	1 Speed	60 Hz	1 Phase	115 / 230 Volts
Insul = F	TEFC	1725 RPM	SF = 1.15	Max 40° C	8.2 / 4.1 Amps

BLADE

PFB-244	4 Wings	5/8" Bore	Polypropylene
---------	---------	-----------	---------------

SHIPPING

52 lbs	27" x 27" x 18"	UPS = Yes	Pallet Quantity = 8
--------	-----------------	-----------	---------------------

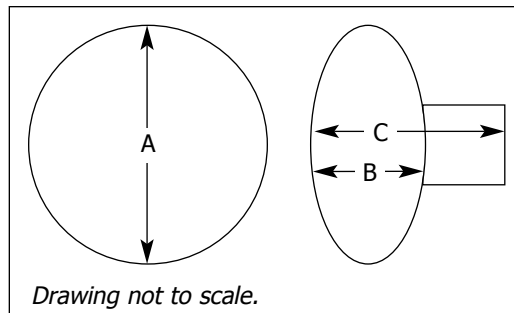

Aquality
WATER SYSTEMS INC.

210-493-4545
www.aqualitywater.com

Test data, performance, energy consumption and other specifications are based on results in a controlled environment. Actual results will vary. Product specifications subject to change. ©2011